


Product sheet - Trestle

TRESTLE TAPT 1220 SWINGING FEET

Use

Trestle for intensive use,
for construction and public works.
Maximal load 200 kg.

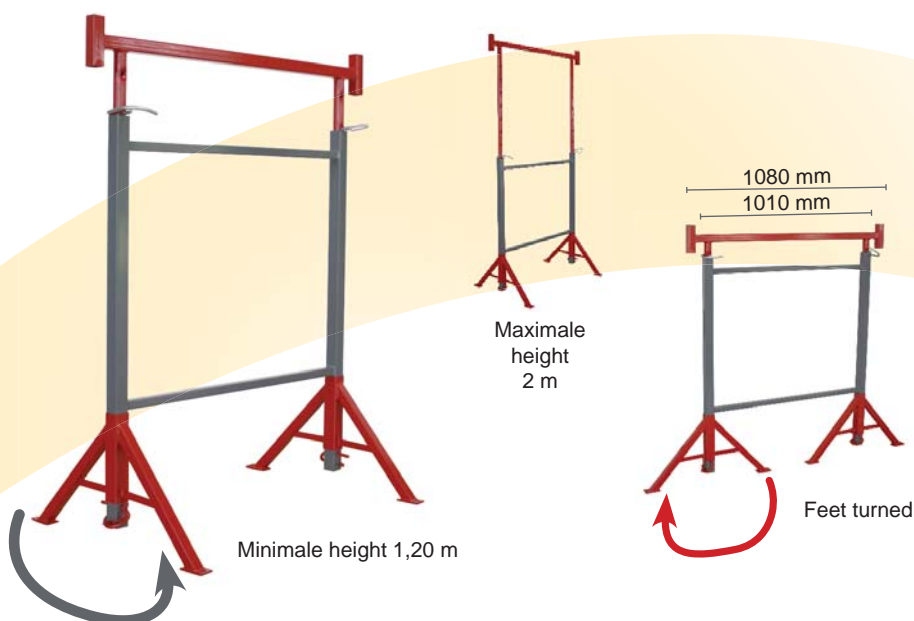

Guard-rail for trestle
Code : 316130001
EAN : 315503161200 9

Product advantages

- Upmarket very resistant trestle, for building and public works professionals.
- Adjustable dimensions : height from 1,20 m to 2 m.
- Swinging feet
 - anti-deformation for increase floor support and stability.
 - reinforced base.
 - Feet secured with pins, don't move during the handling of the trestle.
- Robotically welded.
- Entirely epoxy coated trestle.

Technical data

TRÉTEAU TAPT 1220

Structure	Square tube 40 x 40 x 2 mm. Minimum overlap between body and legs: 125 mm.
	Top rail in squared tube 35 x 35 x 2 mm. Guard-rail stand in squared tube 35 x 35 mm.

Accessory

- Garde-rail for trestle
Height 1150 mm
Squared tube 30 x 30 x 2 mm
- Code : 316130001
- EAN : 315503161200 9

Sizes	Adjustable height from 1200 to 2000 mm. Width 1080 mm.
Weight	17,4 kg.
Packaging and codes	x 30 on a pallet - Delivered with unassembled feet Code 316132300 EAN 315503161323 5 Pallet dimensions: 1220 x 1150 x 1130 mm